


Please read these instructions carefully before starting installation and keep in a safe place for future reference.

Check the contents of the pack carefully before installation. Responsibility will not be held by Crosswater for any de-fit / re-fit costs where faulty product has been fitted. If any fault is found with materials or workmanship, it must be reported immediately to the manufacturer. Remedial action will be taken, based on information received, on condition that: 1. Full details are supplied to the manufacturer; 2. The product has not been modified or tampered with; 3. The manufacturer is informed of any damage/shortages prior to installation. 4. The product has not been installed, or attempts made to install. We do not accept responsibility for any problems that may occur through incorrect installation. ENSURE the room is well heated and ventilated.

Before drilling ensure there are no hidden cables or pipes(water, gas or electrical) behind hanging points. Always wear suitable eye protection when drilling. Ensure the wall surface is able to take the weight of the complete product.

### INSTALLATION INSTRUCTIONS


It is recommended that walls are fully tiled before cabinet installation, This ensures that the product is installed flat to the tile face and allows product to be easily removed if required in the future. Remove all outer packing and carefully check the product is in perfect condition. The mirror is supplied with a protective film DO NOT remove this until installation is complete.

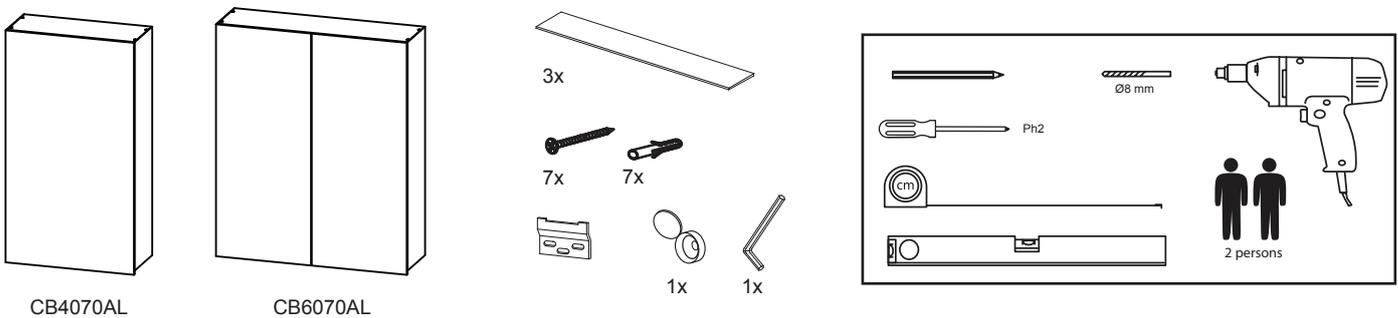

#### STEP 1


Offer the cabinet up to the desired wall location. We recommend that the cabinet is hung at least 200mm above any washbasin/countertop. Using spirit level ensure the cabinet is level and upright. Using a soft pencil mark carefully draw a horizontal line on the wall corresponding with the top of the cabinet.

On the wall surface measure down from the pencil line the distance detailed right. Measure the distance A between hanging bracket centres, then mark the drilling points for the hanging brackets as shown below.

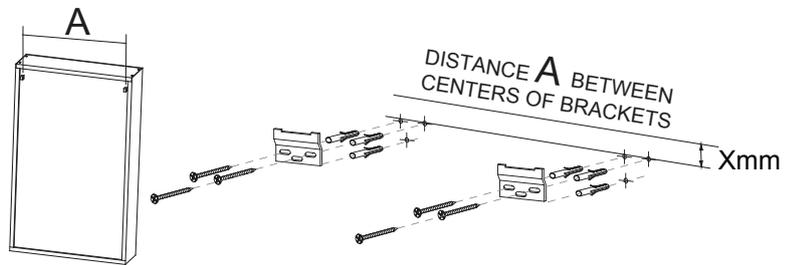

#### STEP 2


Carefully drill the required holes and insert wall plugs. Note screws and plugs supplied are suitable for solid walls only.

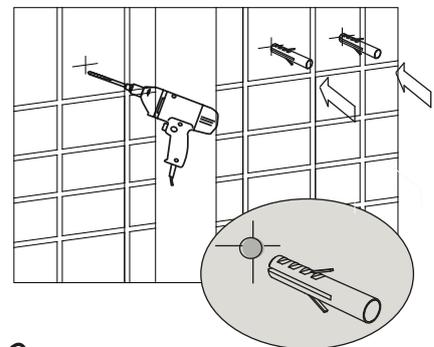

#### STEP 3

Lift up the cabinet onto the hanging brackets and make sure the hanging brackets fit into the slots at the top profile.


Finally fix the carcass of the cabinet to the wall with screw and cover cap provide see right

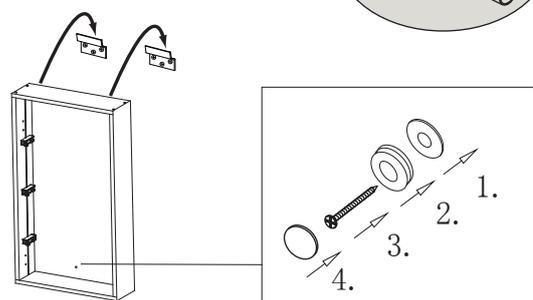

## STEP 4

On double door cabinets it is necessary to remove one door to enable the shelves to be fitted.


Insert the glass shelves into the clips on the inside profile, adjust to required height by carefully sliding up or down. Once at the desired height using the Allen key provided tighten screw A. Then tighten the shelf retaining screw B.

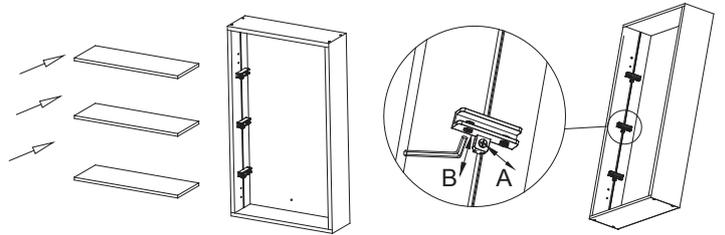

## STEP 5


The doors are aligned during production. However if re-alignment is required first remove the soft close buffer from the bottom hinge - see right.

All of the cabinet hinges have 3 way adjustment, simple adjust screws A, B and C as required - see right. Replace the soft close buffer.

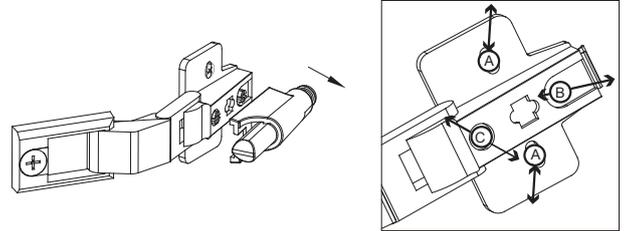

## STEP 6

Run a bead of clear silicone sealant on all four sides between the cabinet carcass and wall surface. Allow 24 hours to set before loading or using the cabinet.

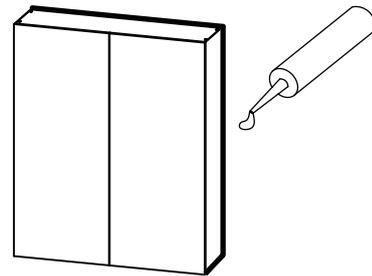

## Reversible Door For single door cabinet


Single door cabinet have a reversible mirror door, it can be switched from left to right hand opening

Remove the soft close buffer and pull the lever towards the center of the cabinet to release the door.

Release the hinge brackets and replace them onto the right profile, make sure the screws are correctly tightened.

Reposition the mirror door on the hinge brackets fixed at the right profile.

If the door is not aligned, please adjust the hinges as per Step 5.

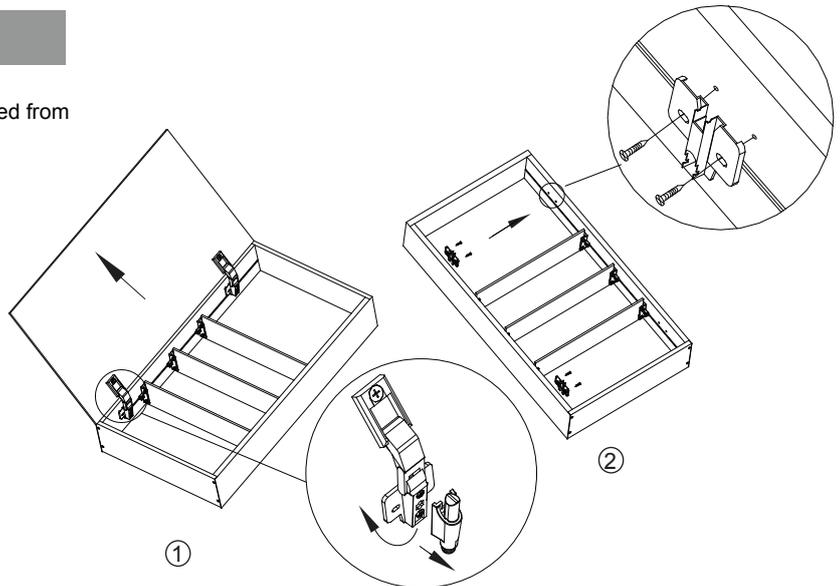

## Care and Maintenance

Do not strike/hit glass components with hard or pointed items. Do not place very hot or very cold items against or in close proximity to glass surfaces unless a suitably thick insulation material is used. Do not place hot items on or against the cabinet carcass  
If the mirror door or a glass shelf becomes broken, replace immediately. For details on replacement glass and other components our contact customer services department on the number below.

Cleaning:

NEVER use products containing bleach, cleaners of a gritty or abrasive nature or so called "glass and mirror" cleaning products, that can be detrimental to the long lasting finish of the mirror.  
ONLY use a clean micro fibre cloth.

For any further information please contact:

Bauhaus on: 0845 873 8840

Or visit our web-site at:

[www.crosswater.co.uk](http://www.crosswater.co.uk)

The manufacturer reserves the right to make technical modifications without prior notice.

**bauhaus** 