
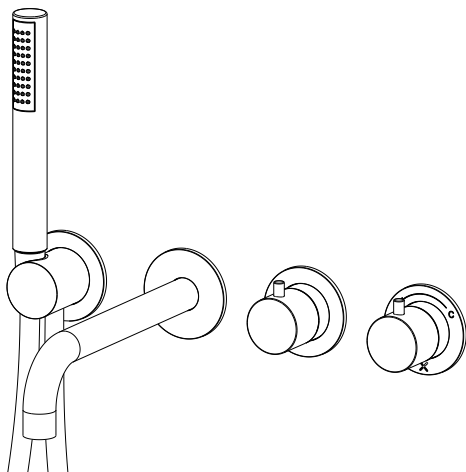
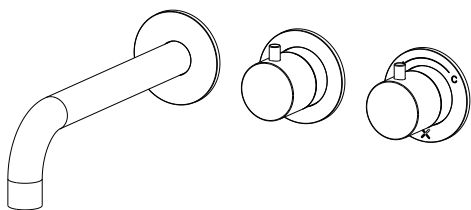
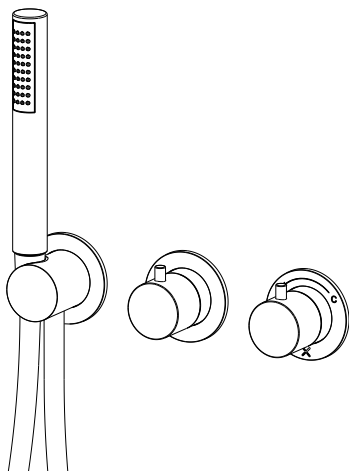




PROMODDIVLBP/PROMOD1601/PROMOD1701/PROMOD440TRIM

MOUNTING INSTRUCTIONS

PRESSURE RANGE MIN/MAX 0,5/5 BAR
(IN CASE OF WATER PRESSURE HIGHTER THAN 5 BAR WE RACOMMEND
INSTALLING PRESSURE REDUCERS).
RECOMMENDED PRESSURE 3 BAR.

OPERATION:
EITHER WITH GAS OR ELECTRIC ACCUMULATION BOILERS.
CENTRALISED SYSTEMS.




The product should only be installed by a suitably qualified plumber/
installer.

SAFETY LOCK AT:	41° C
MIN. WORKING TEMPERATURE:	3° C
MIN. RECOMMENDED:	15° C
MAX. WORKING TEMPERATURE:	70° C
MAX. RECOMMENDED:	65° C
RECOMMENDED THERMAL DIFFERENTIAL	50° C
THERMAL DISINFECTION IS ALLOWED.	

SAFETY SYSTEM WITH FLOW STOP IN CASE OF LACK OF ONE OF THE TWO
WATERS.




WARNING: CONTACT THE PLUMBER FOR THE CHOICE OF THE BEST WATER
HEATING DEVICE.

MODULE 2 CONTROL DIVERTER 2-WAY




press.	flow-rate L/min.		
bar	Exit 1	Exit 2	Exit 1+2
0,5	9,2	9,2	9,7
1	13	13	13,7
2	18,7	18,7	19,7
3	23	23	24,2
4	26,5	26,5	28
5	29,5	29,5	31,4

MODULE 2 CONTROL DIVERTER 3-WAY




press.	flow-rate L/min.		
bar	Exit 2	Exit 1	Exit 3
0,5	10	10	9,7
1	13,6	13,7	13,4
2	19,2	19,5	19
3	23,4	23,8	23,3
4	27	27,5	26,8
5	30	30,5	29,8

MODULE 2 CONTROL 2-WAY TRIMSET WITH HANDSHOWER

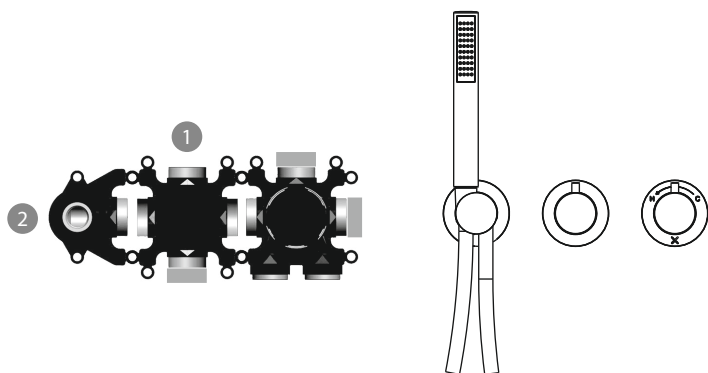


press.	flow-rate L/min.		
bar	Exit 1	Exit 2 for Shower	Exit 1+2
0,5	9,2	4,2	9,3
1	13	6	13,4
2	18,7	8,5	19
3	23	10,7	23,5
4	26,5	12,3	27
5	29,5	13,8	30,3

MODULE 2 CONTROL 2-WAY TRIMSET WITH BATH SPOUT

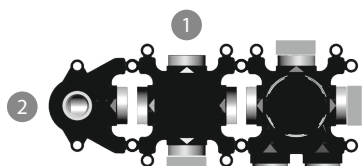


press.	flow-rate L/min.		
bar	Exit 1	Exit 2 for Spout	Exit 1+2
0,5	9,2	8,5	10
1	13	12,5	14,1
2	18,7	18	20
3	23	22,3	24,6
4	26,5	26	28,6
5	29,5	29	32

MODULE 2 CONTROL 3-WAY TRIMSET WITH HANDSHOWER

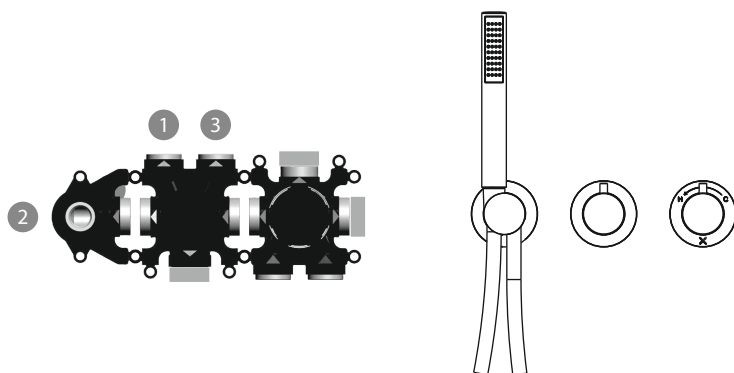


press.	flow-rate L/min.		
bar	Exit 2 Hand Shower	Exit 1	Exit 3
0,5	4,1	10	9,7
1	6	13,7	13,4
2	8,5	19,5	19
3	10,6	23,8	23,3
4	12,3	27,5	26,8
5	13,8	30,5	29,8

MODULE 2 CONTROL 3-WAY TRIMSET WITH BATH SPOUT

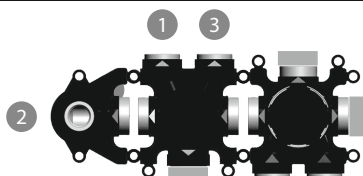


press.	flow-rate L/min.		
bar	Exit 2 Bath Spout	Exit 1	Exit 3
0,5	8,5	10	9,7
1	12,5	13,7	13,4
2	18	19,5	19
3	22,3	23,8	23,3
4	26	27,5	26,8
5	28,8	30,5	29,8

MODULE 2 CONTROL 2-WAY TRIMSET WITH BATH SPOUT & HANDSHOWER

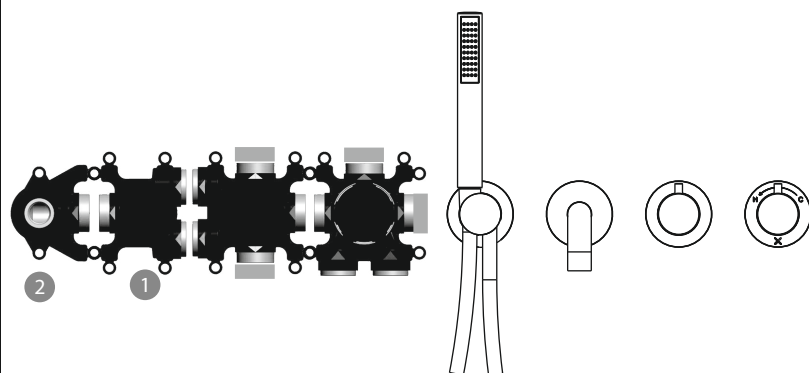


press.	flow-rate L/min.		
bar	Exit 1 Bath Spout	Exit 2 Hand shower	Exit 1 +2
0,5	8	4,1	8,8
1	11,7	6	12,7
2	17	8,5	18,3
3	21	10,6	22,5
4	24	12,3	25,6
5	26,7	13,8	28,5


MODULE 2 CONTROL DIVERTER TRIMSET

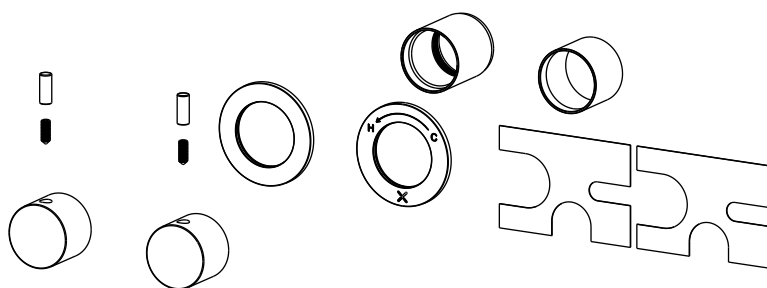

GB MOUNTING ISTRUCTIONS




MODULE 2 CONTROL TRIMSET WITH HANDSHOWER

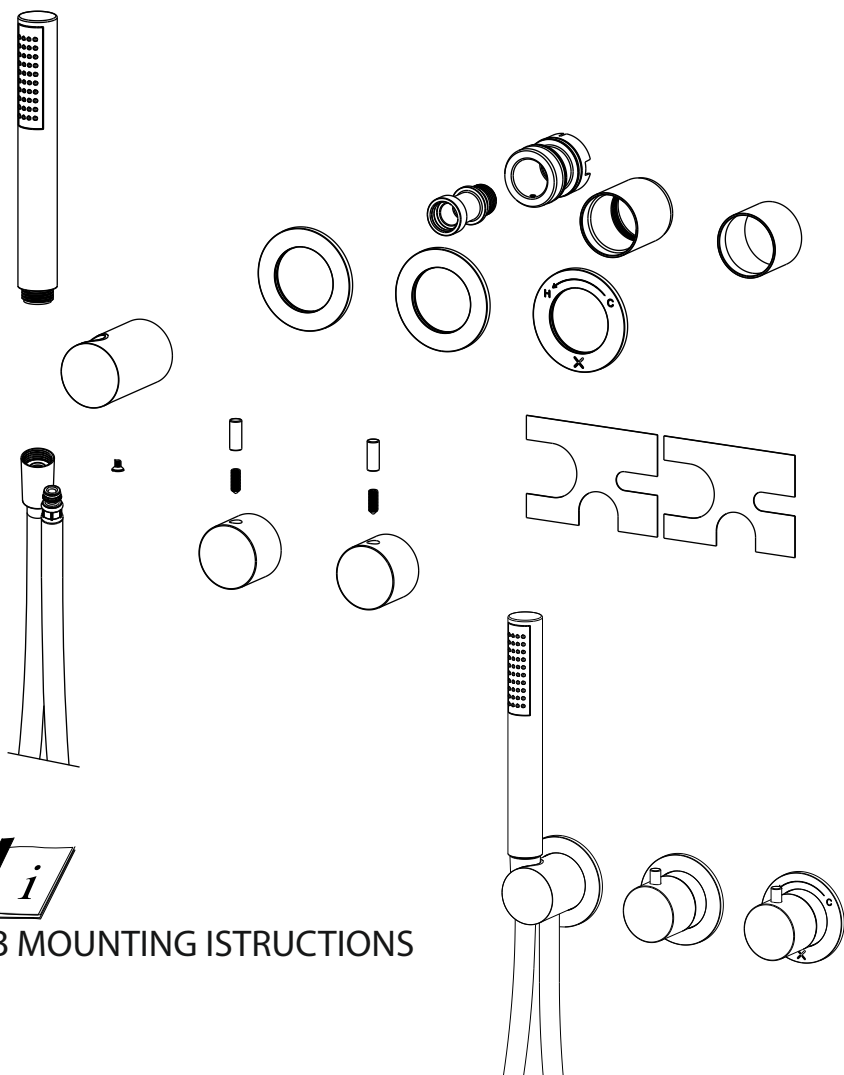


GB MOUNTING ISTRUCTIONS


MODULE 2 CONTROL TRIMSET WITH BATH SPOUT




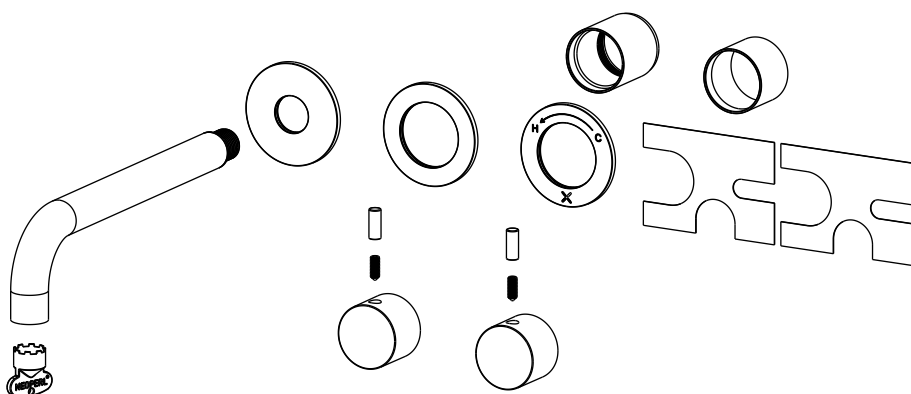


GB MOUNTING ISTRUCTIONS

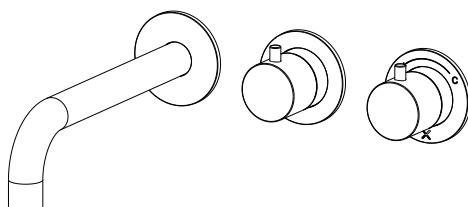


MODULE 2 CONTROL TRIMSET WITH BATH SPOUT & HANDSHOWER

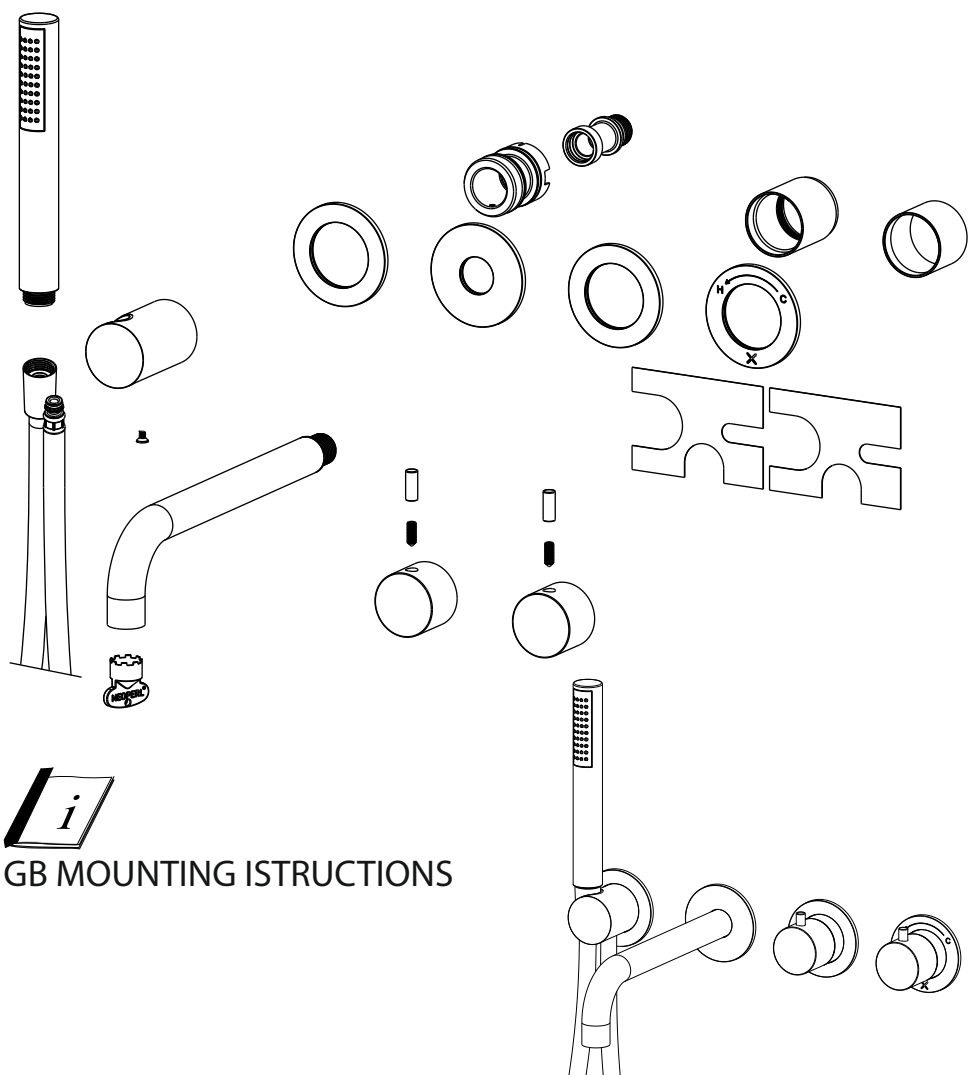


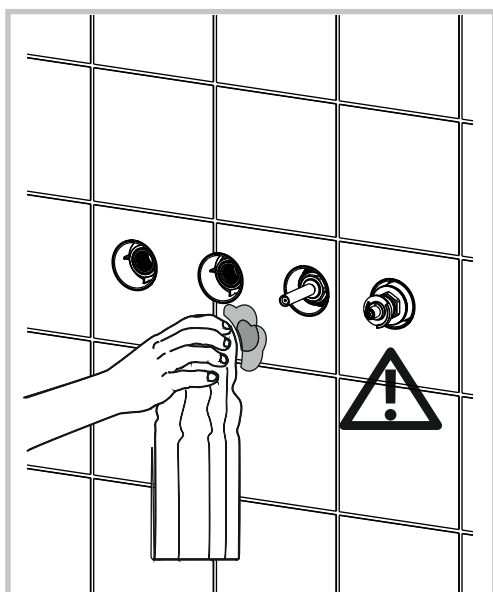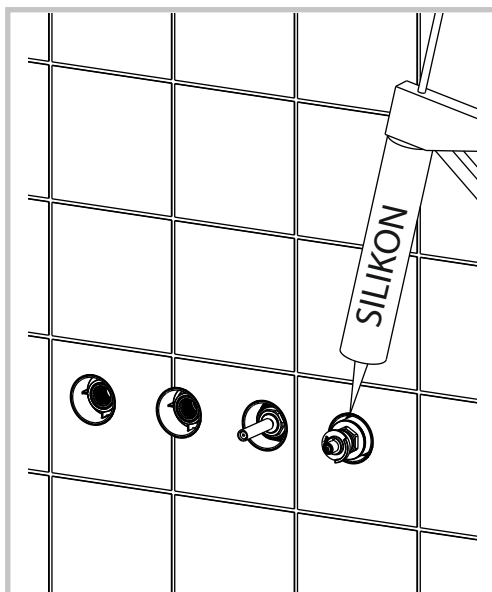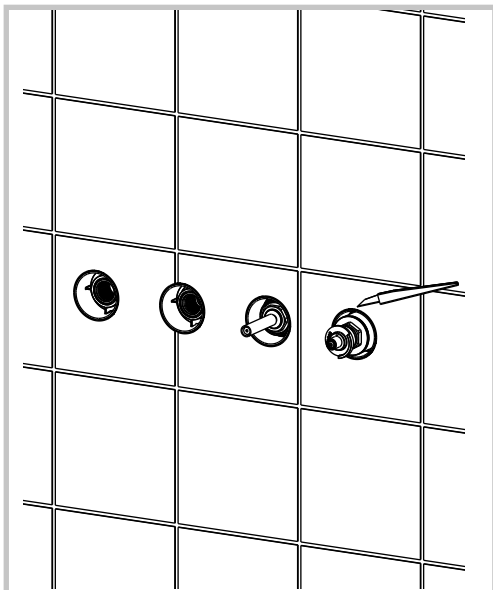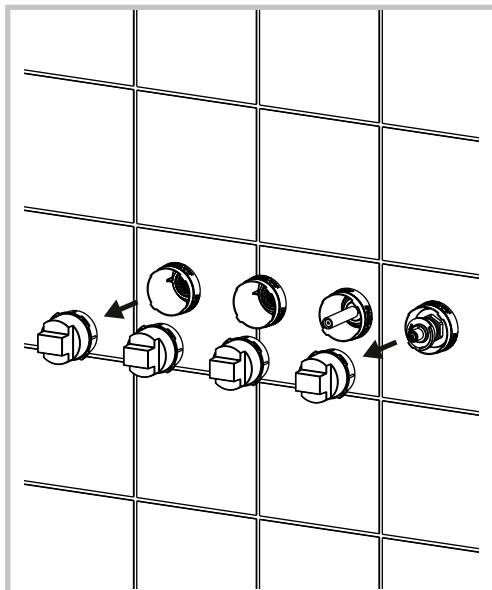


1


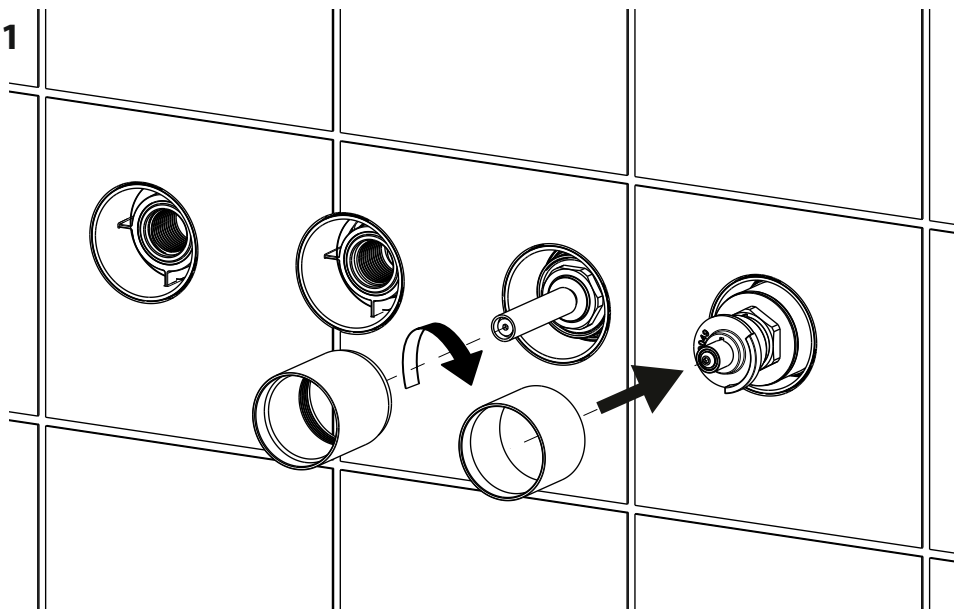


2

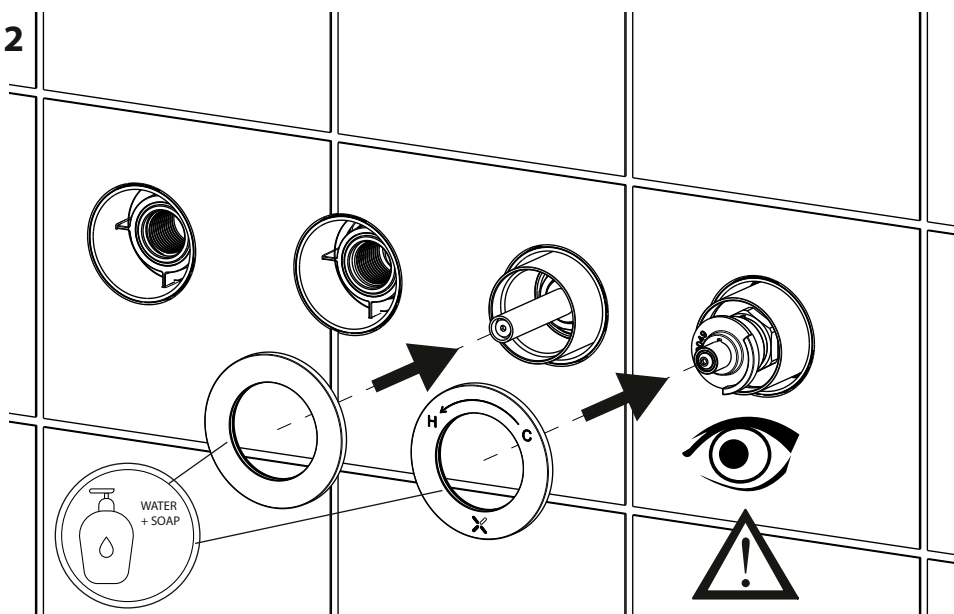


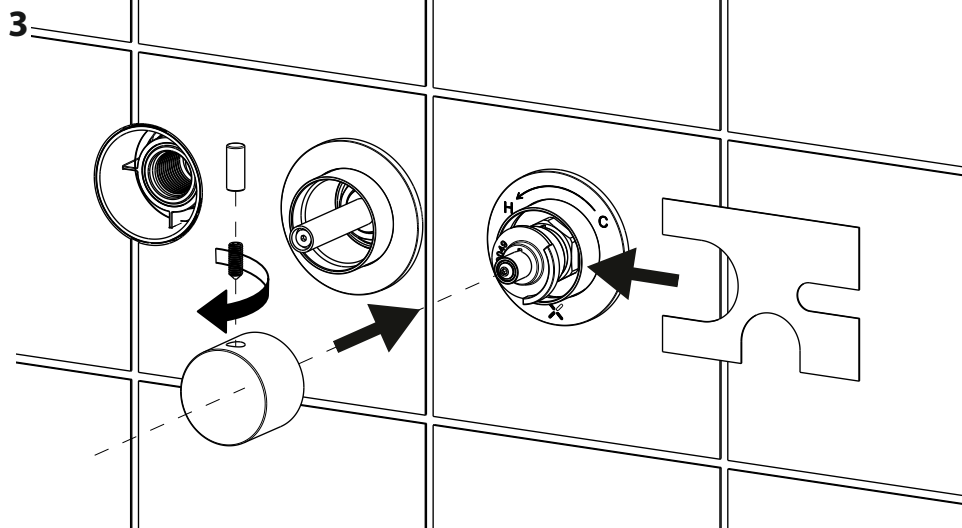



4

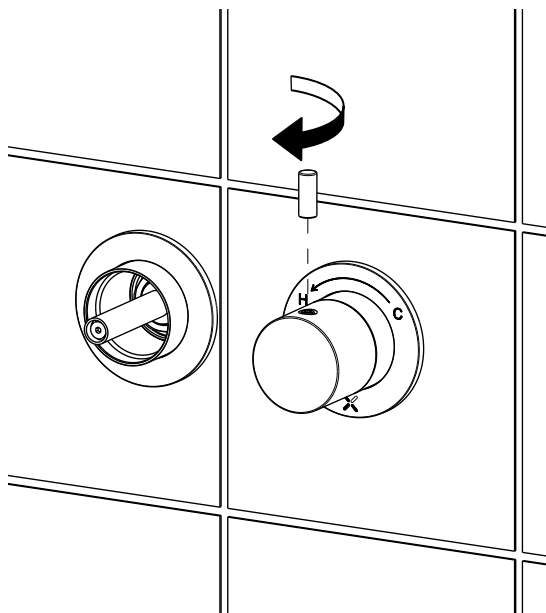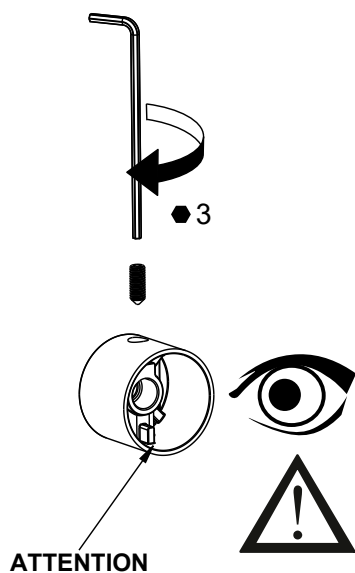


5

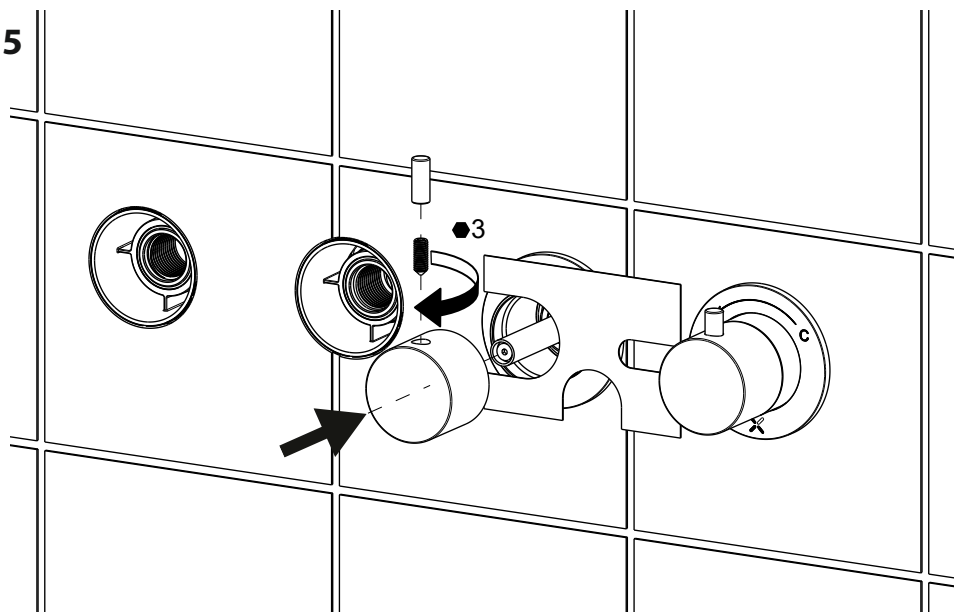


6

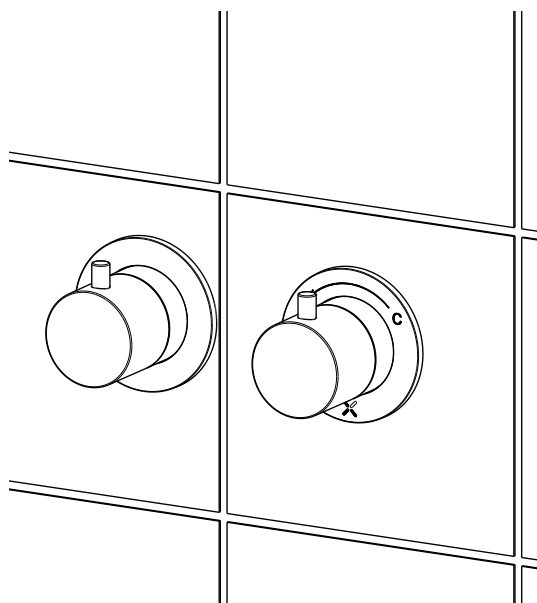
**OK**

- 7** ATTENTION: CHECK THE CLEANING OF THE INDICATED AREAS BEFORE PROCEEDING WITH THE INSTALLATION OF THE AESTHETIC PARTS, DRAIN A GOOD QUANTITY OF WATER TO CLEAN THE SYSTEM FROM DIRT AND RESIDUES.

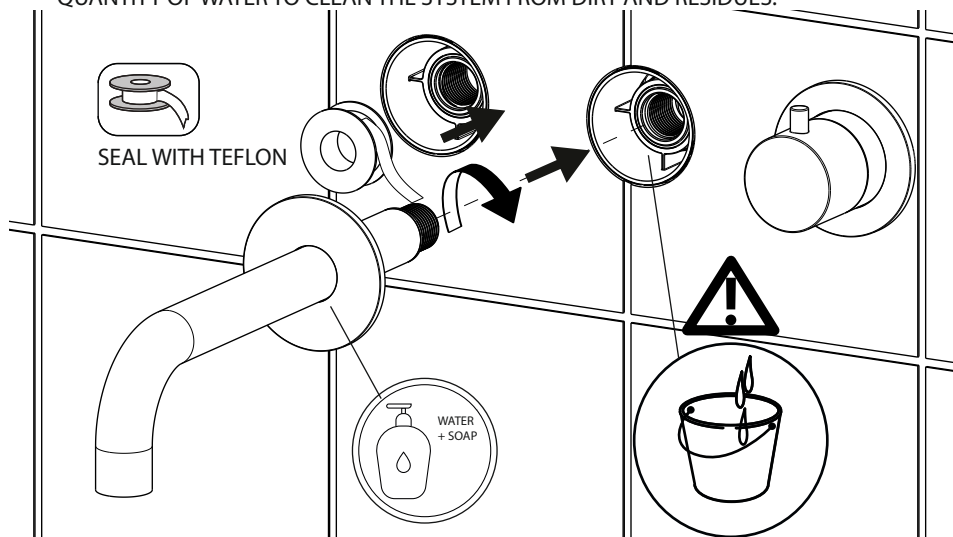


- 8**
-
- Diagram 8 illustrates the orientation and locking of the spout. It shows the faucet handle and spout assembly. A circular inset shows a bucket of water with a flame, indicating a warning or caution. The text "ORIENT AND LOCK THE SPOUT" is shown. The word "OK" is displayed next to the faucet handle and spout assembly.

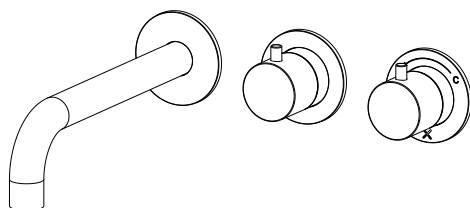


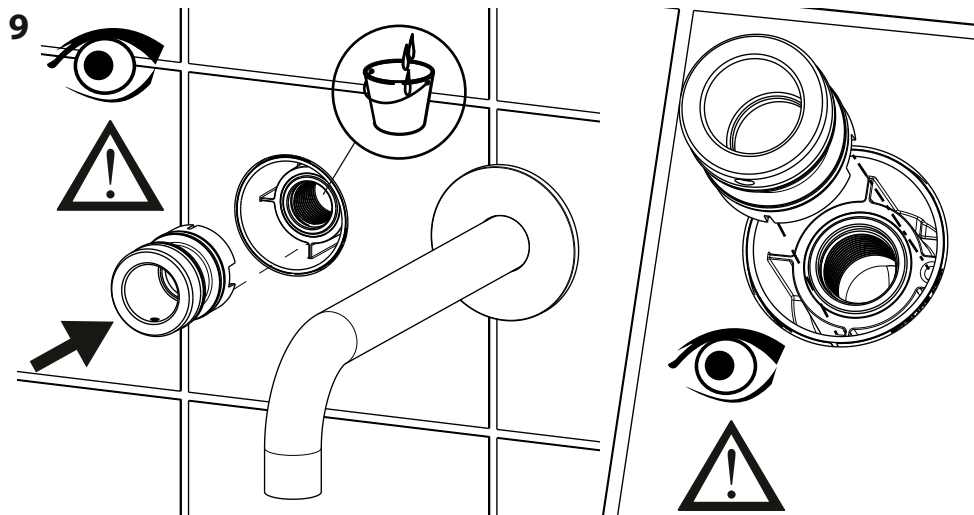


ATTENTION: CHECK THE CLEANING OF THE INDICATED AREAS
BEFORE PROCEEDING WITH THE INSTALLATION OF THE AESTHETIC PARTS,
DRAIN A GOOD QUANTITY OF WATER TO CLEAN THE SYSTEM FROM DIRT AND RESIDUES.

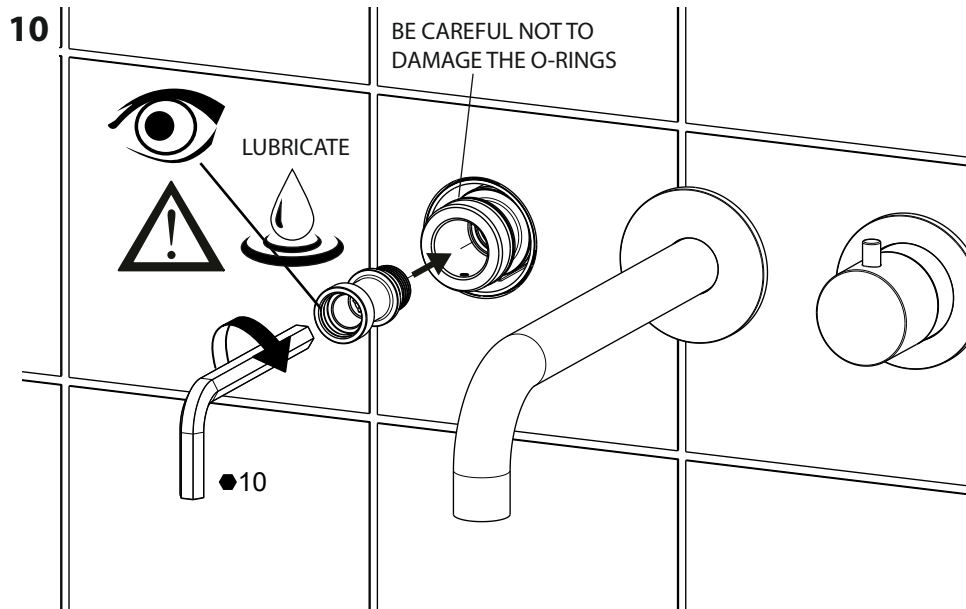


11

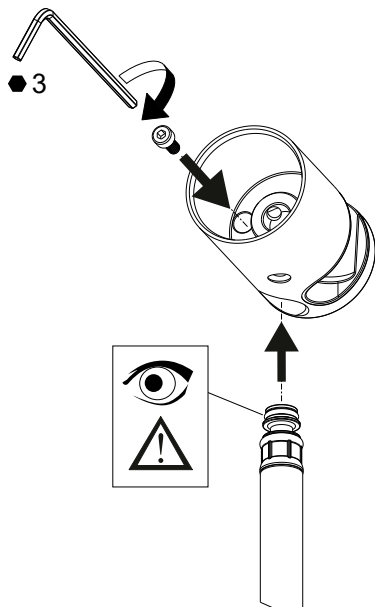


ATTENTION:
CHECK THE CORRECT POSITION OF THE HOSE

**OK****NOT OK**


12


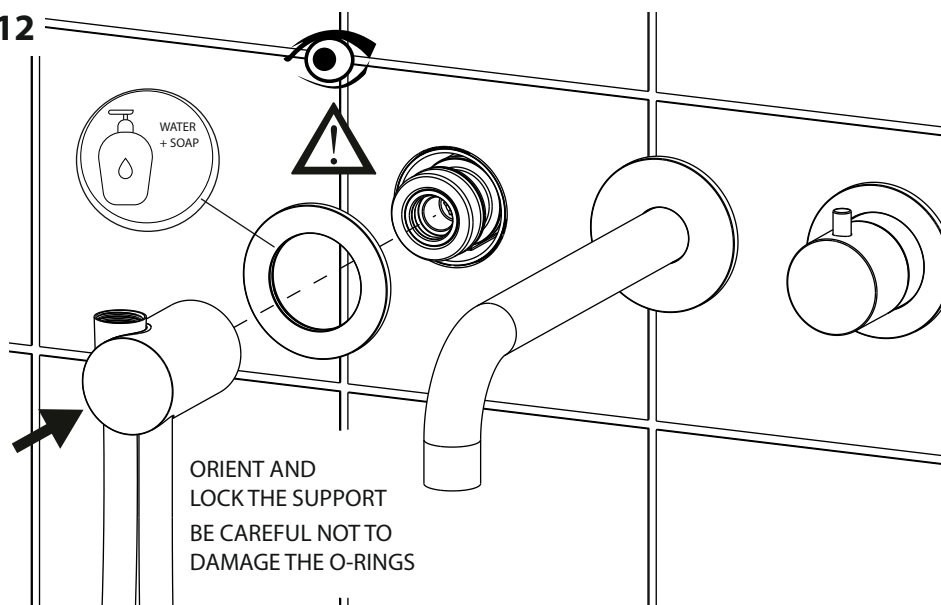




13

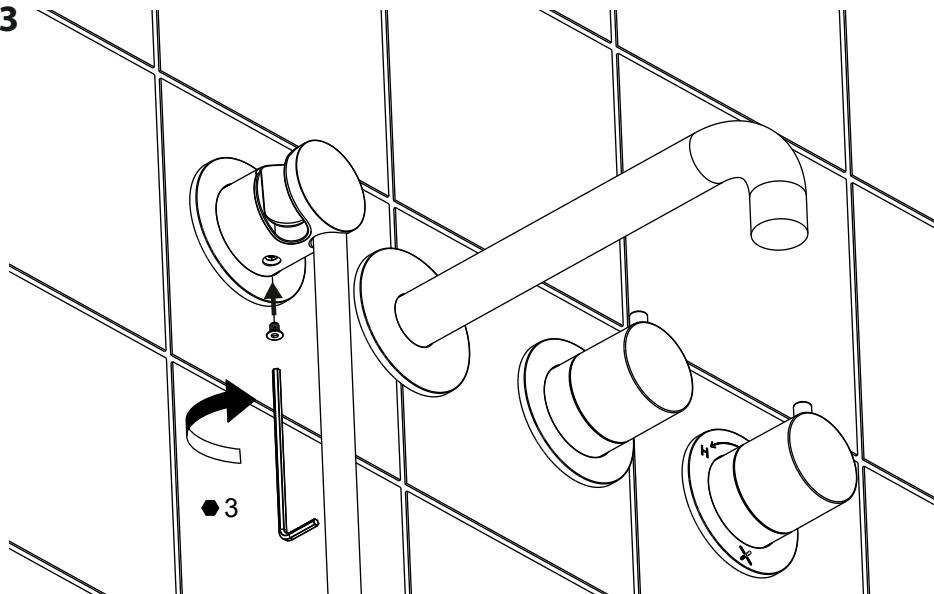



14

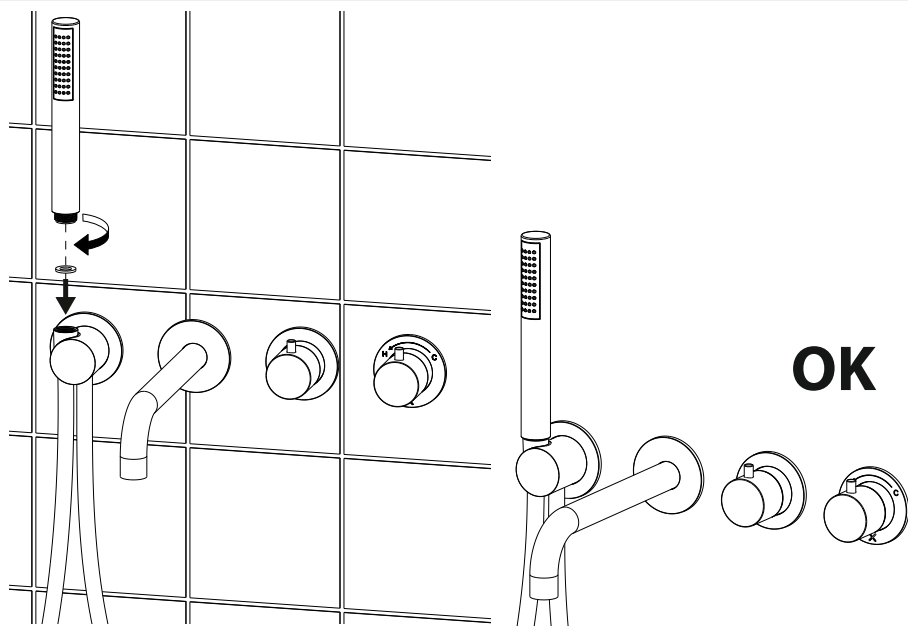



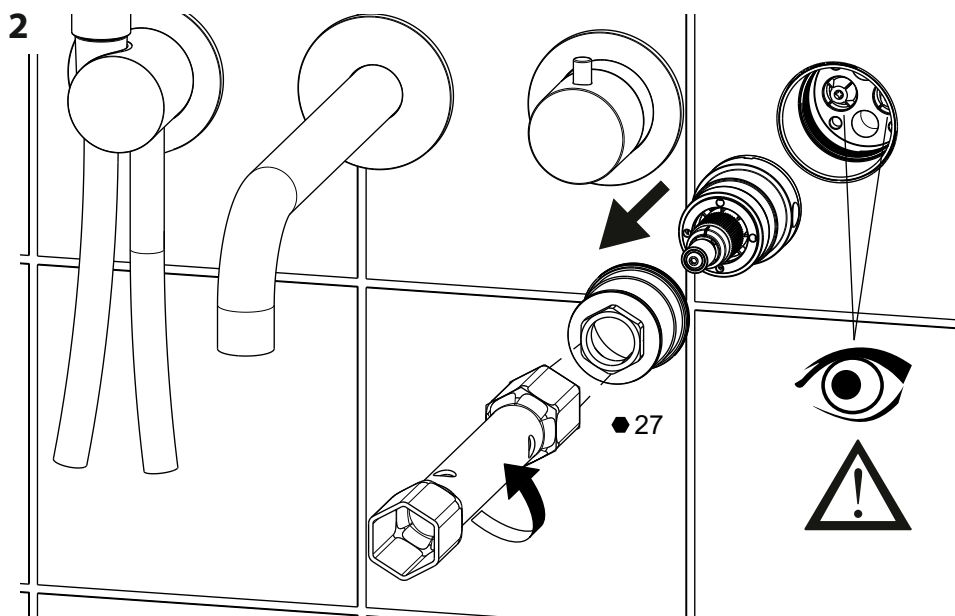
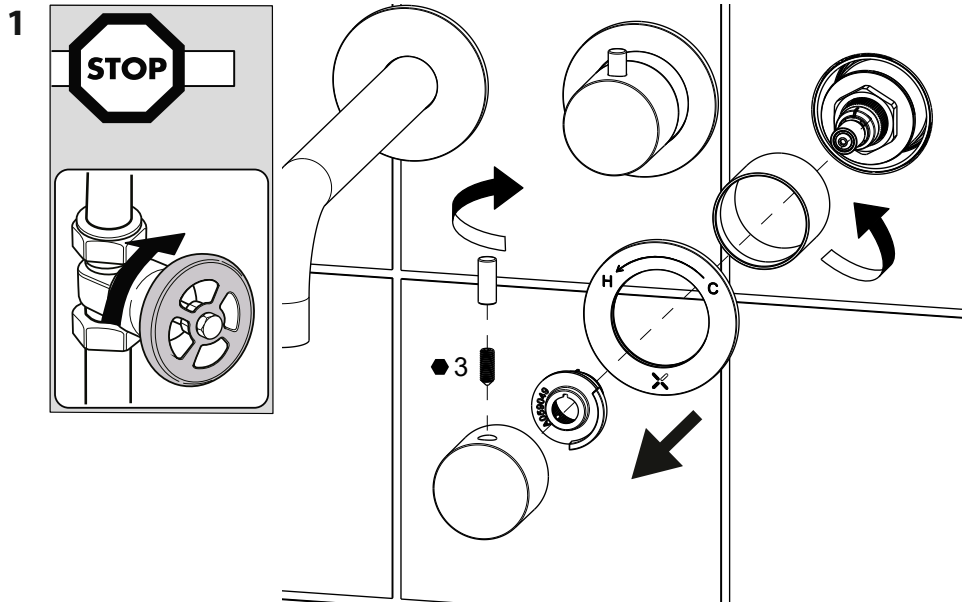


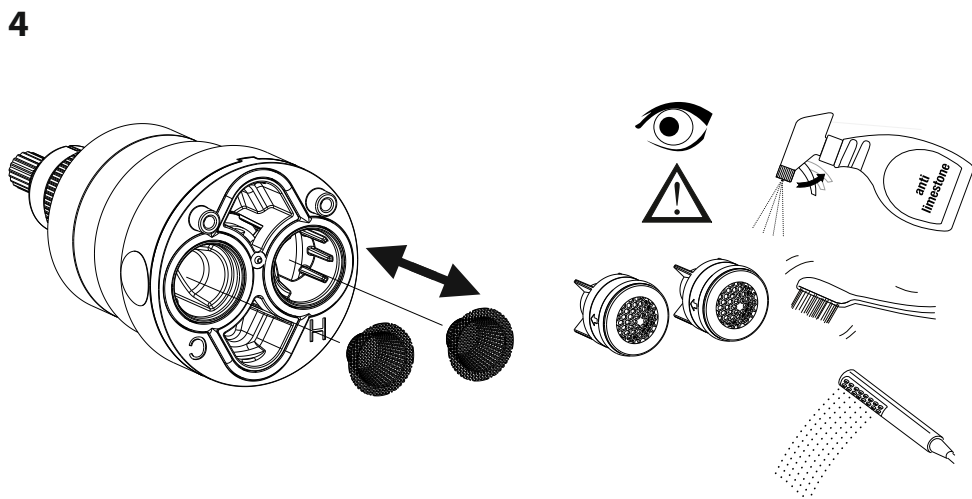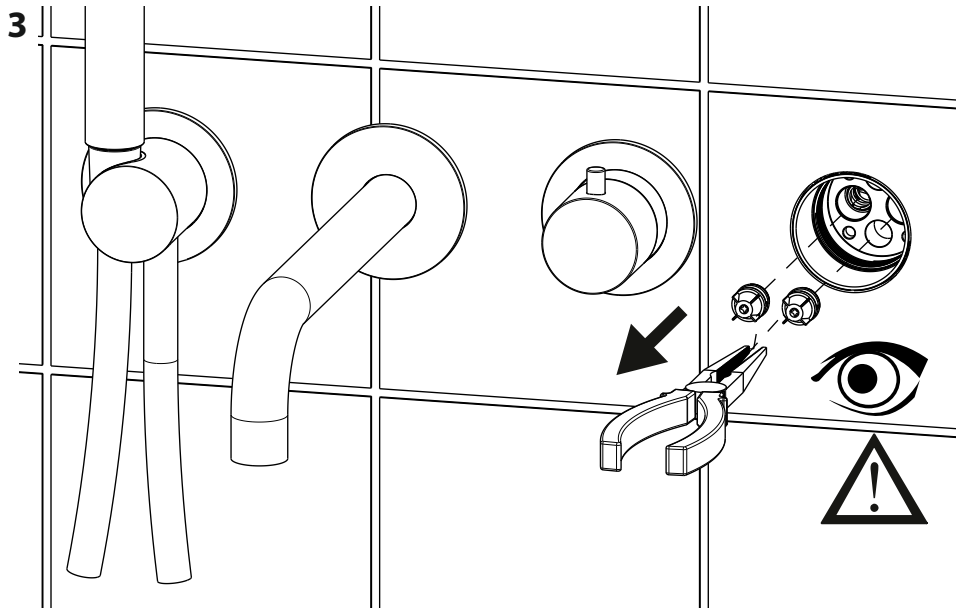



5

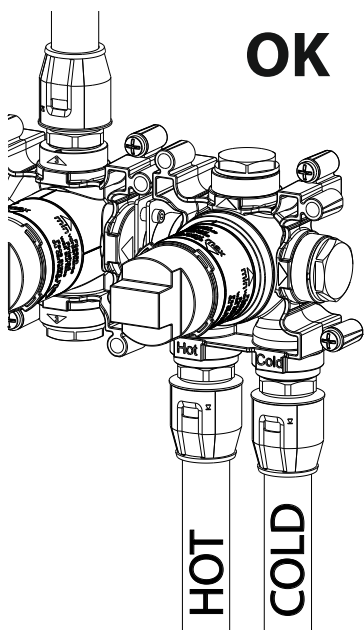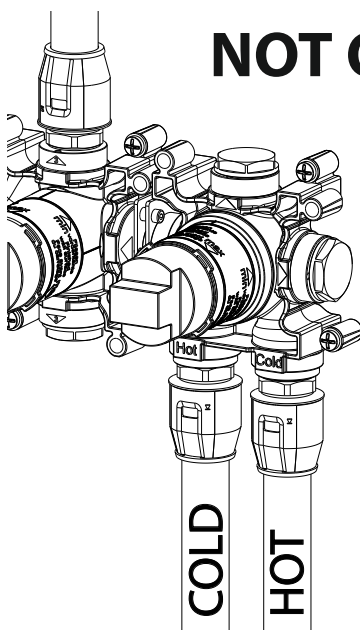OK**NOT OK**


6

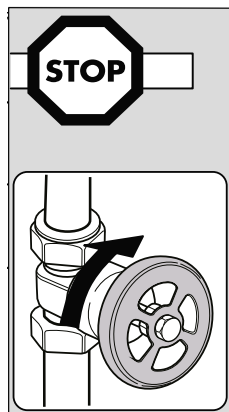**ROTATE 180°**


7

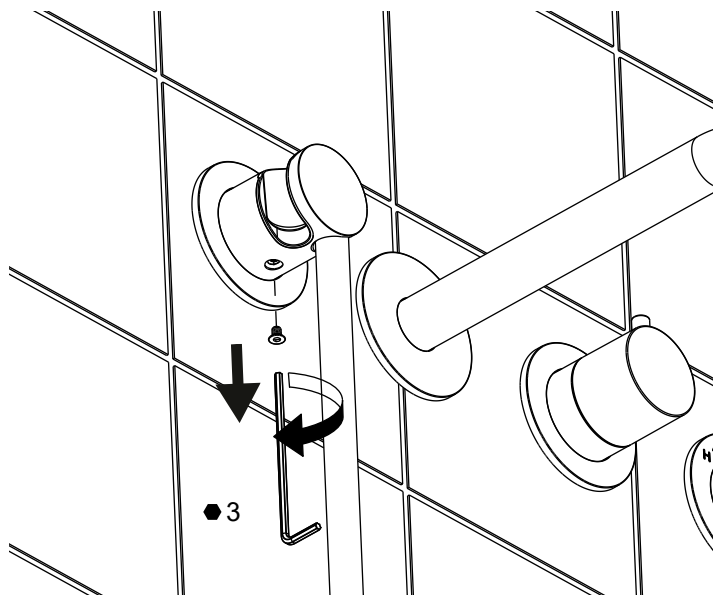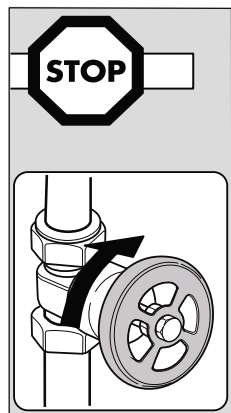

8

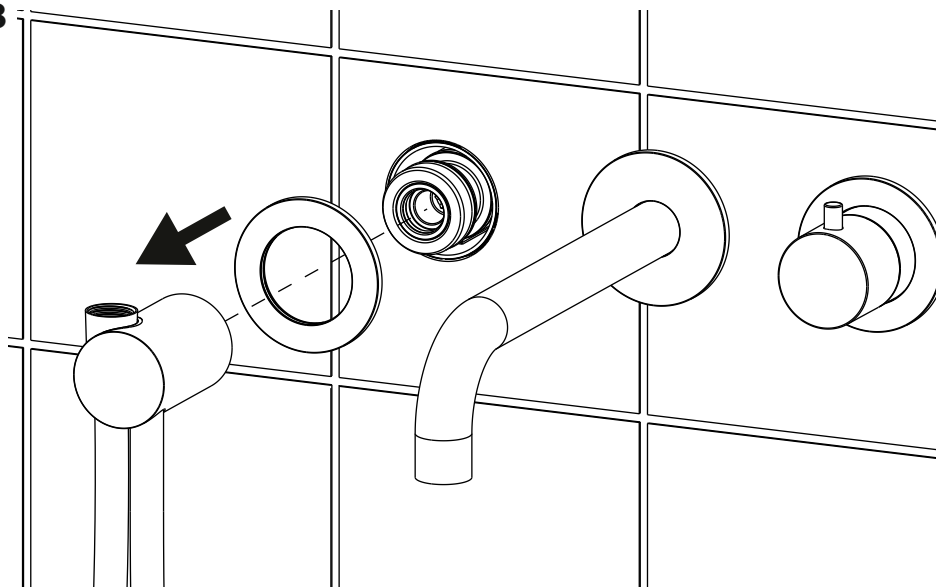

9

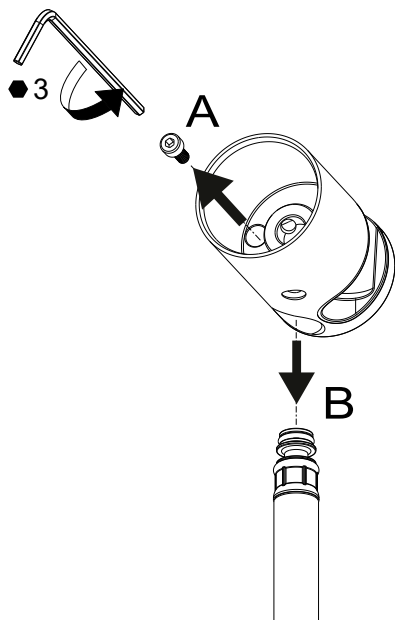

**REPLACE THE FLEX HOSE
AND START FROM POINT 11**

