
Optix 10 Single Inline Panel Screen

Manufactured to: BS EN 14428

IMPORTANT

BEFORE STARTING THE INSTALLATION ENSURE ALL THE DOOR SIZE MEASUREMENTS CORRESPOND WITH THE INSTALLATION AREA INCLUNDING THE FINISHED TILED/PANELLED WALLS.
RETURNS DUE TO INCORRECT SIZING WILL NOT BE ACCEPTED.






Important Pre-Installation


Ensure the bath rim is as flat as possible, this will assist in a smooth and water tight moving door operation.

900mm Optix 10 Single Inline Panel Screen LH 40Kgs

900mm Optix 10 Single Inline Panel Screen RH 40Kgs

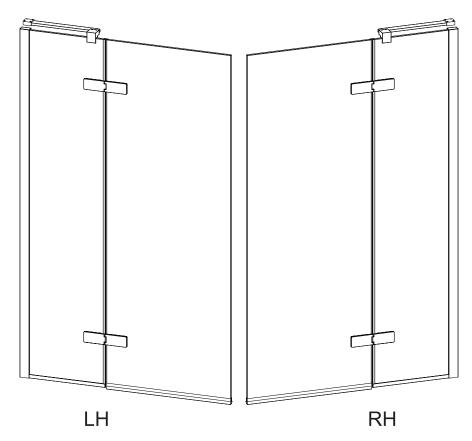

Optix 10 Single Inline Panel Screen

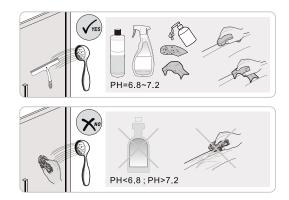







IMPORTANT - Please read before installation

Please read these instructions carefully before starting installation and keep in a safe place for future reference.

Check the contents of the pack carefully before installation. Crosswater will not be held responsible for any de-fit / re-fit costs where faulty product has been fitted.

If any fault is found with materials or workmanship, it must be reported immediately to the manufacturer. Remedial action will be taken, based on information received, on condition that:

- 1. Full details are supplied to the manufacturer;
- 2. The bath screen has not been modified or tampered with;
- 3. The manufacturer is informed of any damage/shortages prior to installation.

We do not accept responsibility for any problems that may occur through incorrect installation.

The success of the installation and operation of any bath screen is, of course, dependant on the squareness, alignment and construction of the walls to which fixing is to be carried out.

VERY IMPORTANT

You must complete all tiling and grouting, and the bath tub **MUST** be level and fully sealed to the tiles before installation. If you do not fit the bath screen onto a tiled surface, or seal the tiles to the bath before installation, water may soak into the wall behind the wall profiles.



INSTALLATION - Advise and safety

The installation instructions are based on typical use and conditions.

All doors are designed to open outwards only.

Ensure that the product can be fixed to a solid masonry/brick wall or suitable timber stud work grade C16-C24 in the area behind the wall profile and wall brackets.

These instructions have been prepared for your guidance, you must exercise due care at all times.

For Health and Safety 2 people must carry out the installation of this bath screen.

Handle glass with care. Although the glass supplied is toughened safety glass(**EN12150**), impacts can damage both the glass and the frame.

Warning!

Please check for any hidden pipes or cables before drilling holes in the wall.

When using power tools always follow the manufacturers user instructions.

If the Framework is sealed to the bath on the inside, any water that may get into the framework will not be able to drain back into the tray, this may cause the bath screen to leak.

Leave the silicone sealant to dry for 24 hours before using the bath screen


CARE AND CLEANING


Do not use solvents or abrasive material or chemicals to clean the bath screen.

Only clean using soapy water and soft cloth, rinse thoroughly afterwards.


INSTALLATION - Left and Right hand

The bath screen has left and right hand versions. This instruction shows the LEFT HAND installation.









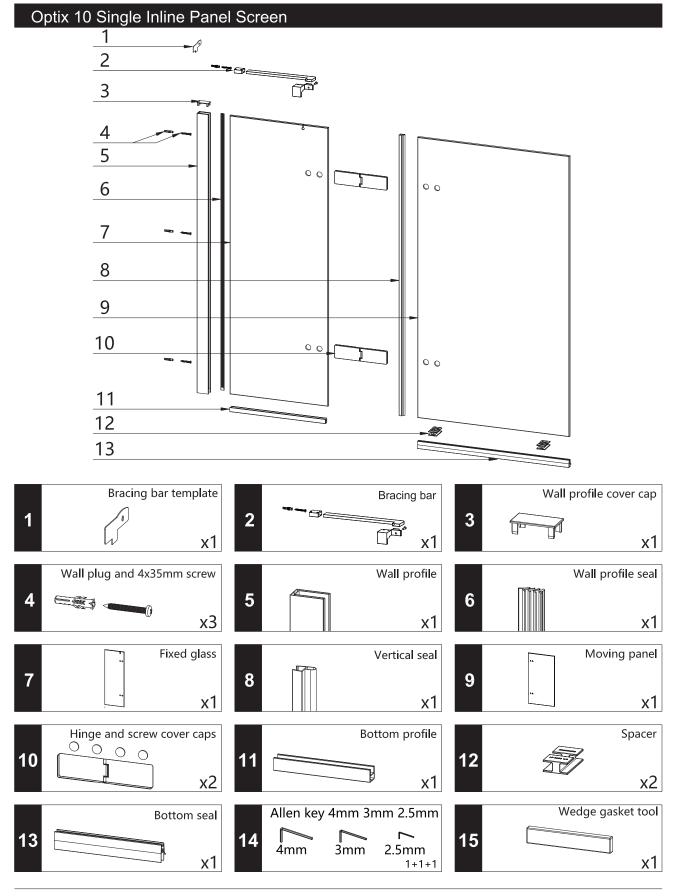




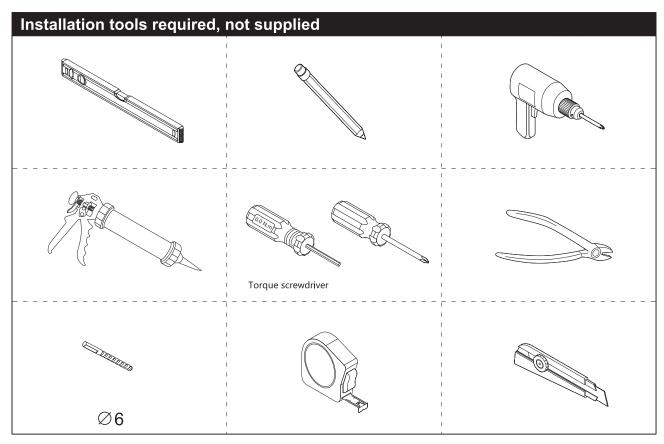


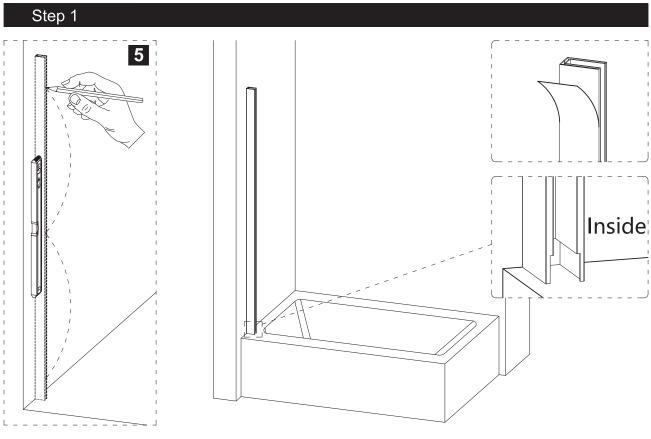




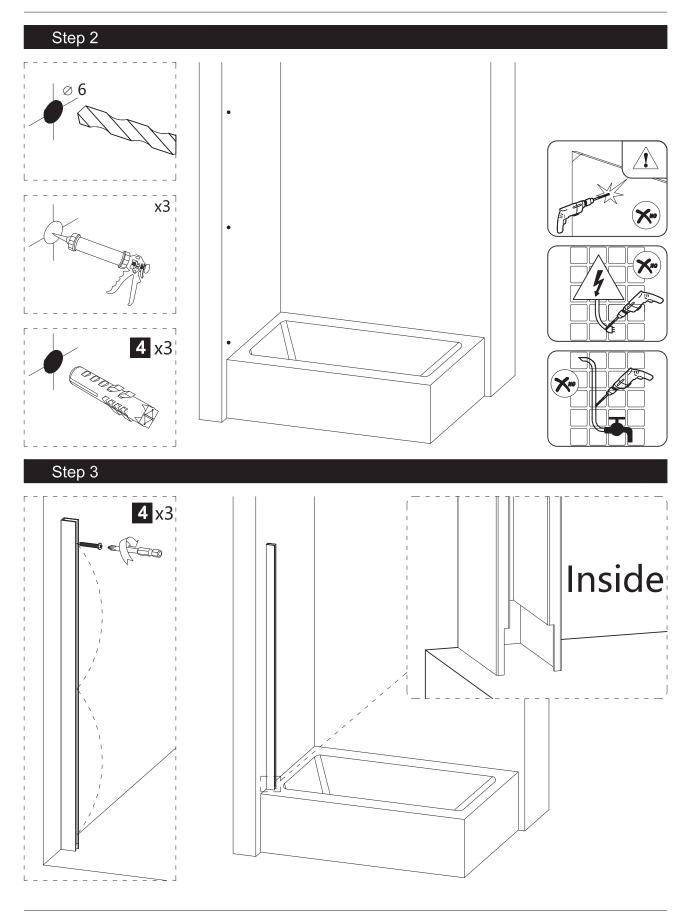




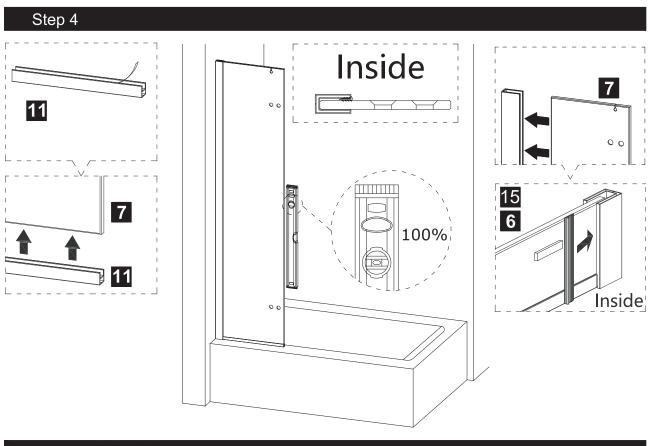


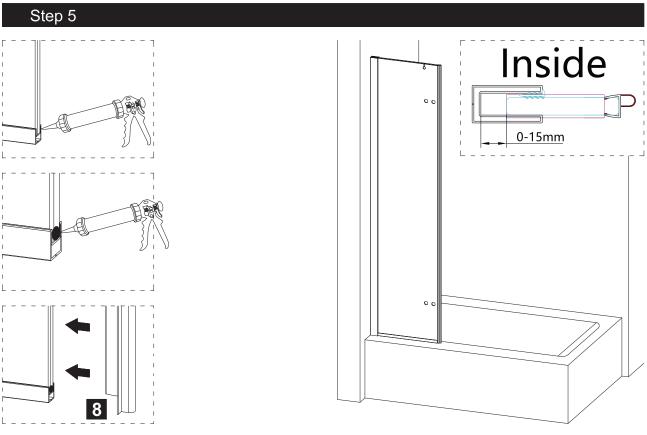




Step 6



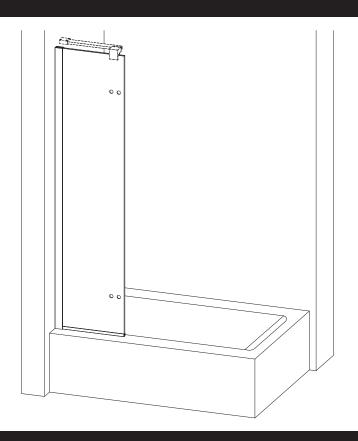


Step 7

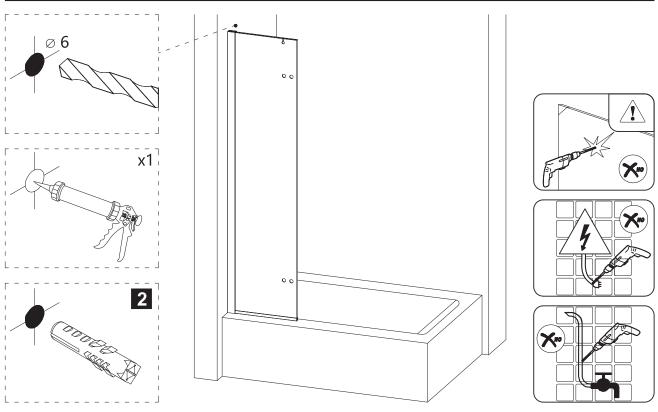


В




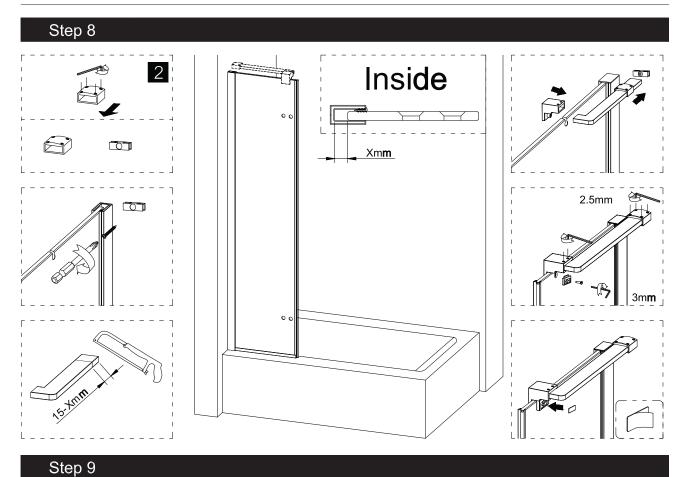

Max Torque: 8 N.m Max Torque: 8 N.m



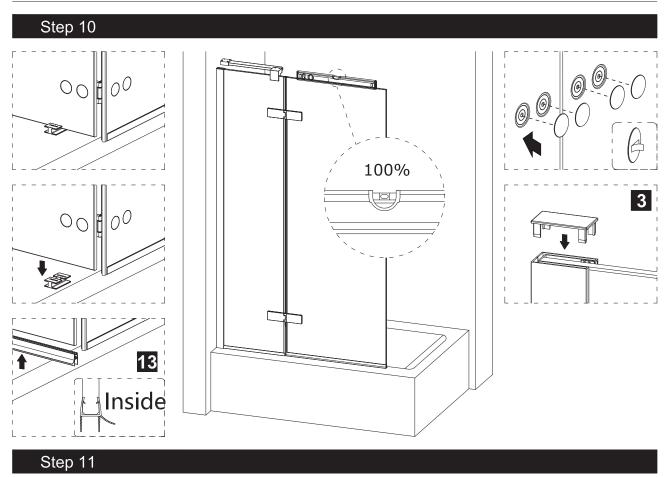

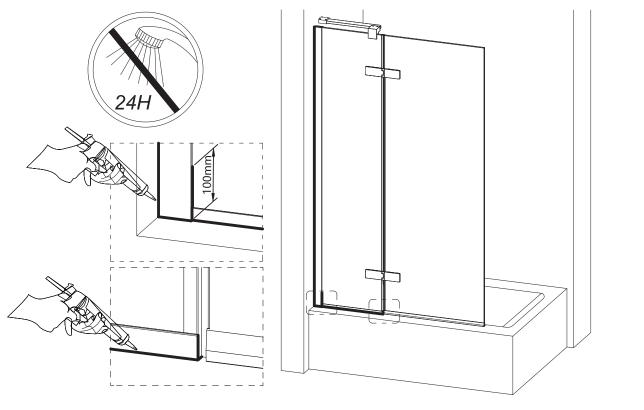





For any further information please contact Crosswater Phone number, 0345 873 8840 Website, www.crosswater.co.uk Email address, sales@crosswater.co.uk The manufacturer reserves the right to make technical modifications without prior notice.