

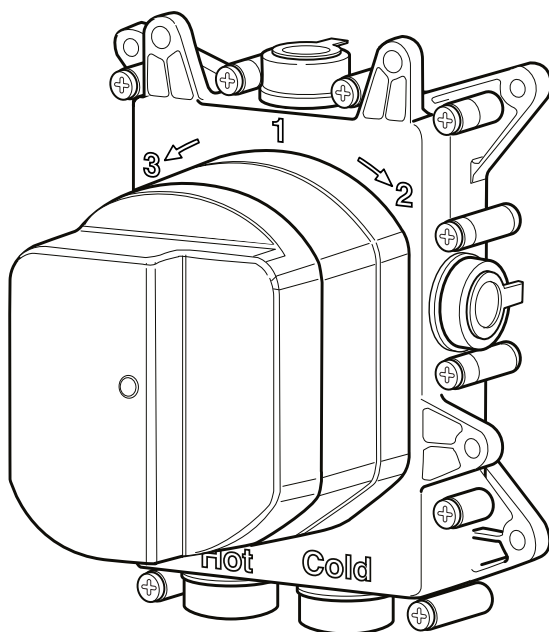




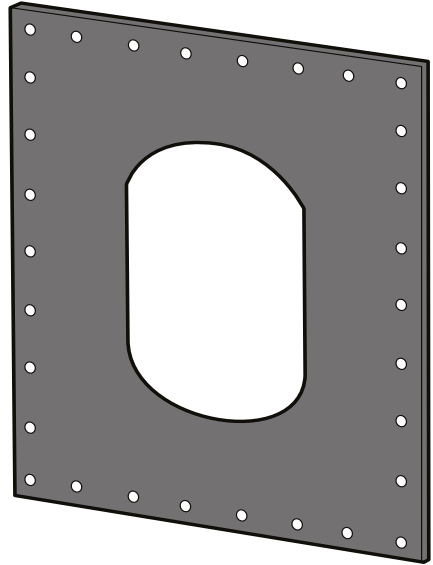

CROSSBOX

Mounting Instructions

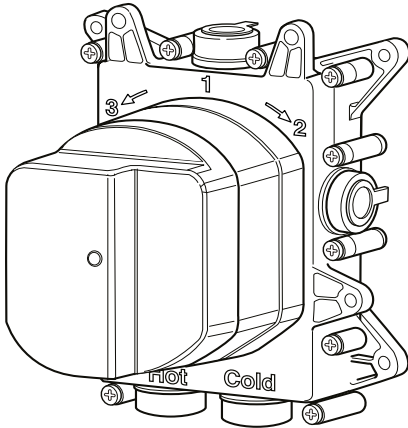

Mounting instructions



Pressure range min/max 0,5/5 bar

(in case of water pressure higher than 5 bar we recommend installing pressure reducers).

Recommended pressure 3 bar.

Operation:

Either with gas or electric accumulation boilers.

Centralised systems.

The product should only be installed by a suitably qualified plumber/installer.

<i>Safety lock at:</i>	41° C
------------------------	-------

<i>Min. Working temperature:</i>	3° C
----------------------------------	------

<i>Min. recommended:</i>	15° C
--------------------------	-------

<i>Max. Working temperature:</i>	70° C
----------------------------------	-------


<i>Max. recommended:</i>	65° C
--------------------------	-------



<i>Recommended thermal differential</i>	50° C
---	-------

Thermal disinfection is allowed.

Safety system with flow stop in case of lack of one of the two waters.

Warning: contact the plumber for the choice of the best water heating device.

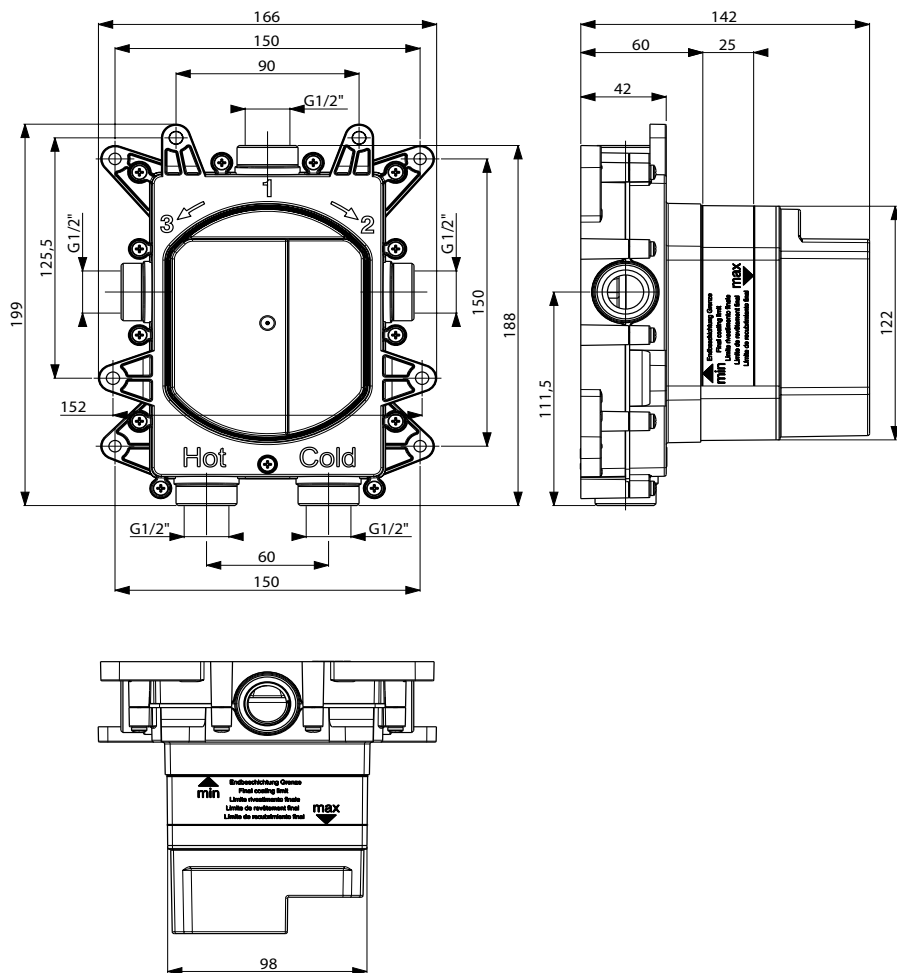


Press.	FLOW RATE (L/min)			
	Push button 2 ways			
				
	Exit 1		Exit 2	
	min.	max.	min.	max.
	0,5	1,5 7,5	1,5	7,5
	1	2,3 11,3	2,3	11,2
	2	3,5 16,5	3,5	16
	3	4,5 20,5	4,5	20
	4	5,5 23,7	5,2	22,8
	5	5,7 26,5	5,7	25,5


Press.

FLOW RATE (L/min)


Push button 3 ways



Exit 1



Exit 2



Exit 3

bar

min. max.

min. max.

min. max.

0,5

1,8 8,1

1,8 7,7

1,8 7,7

1

2,7 11,8

2,6 11,5

2,6 11,5

2

3,9 16,8

3,9 16,7

3,9 16,7

3

4,8 20,7

4,8 20,5

4,8 20,5

4

5,5 24

5,5 23,7

5,5 23,7

5



6,2 26,7

6,2 26,6

6,2 26,6

**2 WAYS - ONLY PUSH VERSION**

ATTENTION:
indications valid only
for PUSH VERSION!

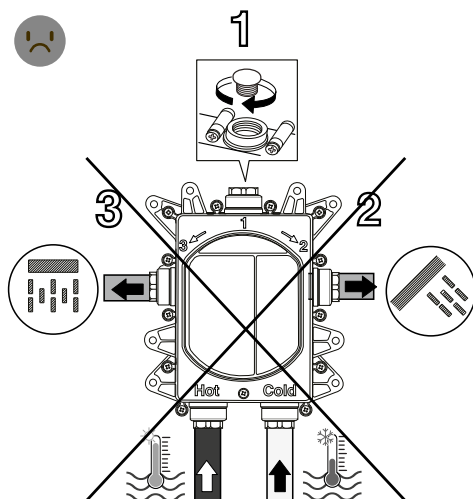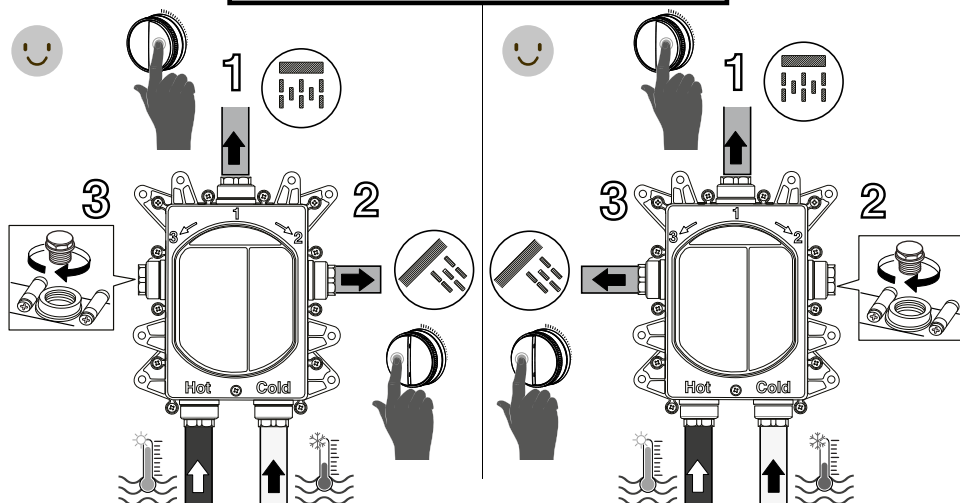

**3 WAYS - ONLY PUSH VERSION**

ATTENTION:
indications valid only
for PUSH VERSION!










1






3

2

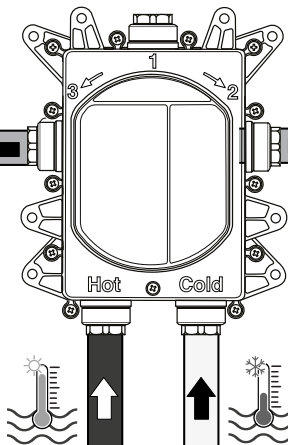


Press.		FLOW RATE (L/min)			
bar	Term. 1 way		Term. 2 way		
					
	Exit 1/2/3		Exit 2	Exit 3	Mix
	8,2		8,2	8,2	9,2
	11,7		11,7	11,7	13,2
	16,7		16,4	16,4	18,7
	20,7		20	20	22,9
	24		23	23	26,4
	26,6		25,8	25,8	29,5




Press.	FLOW RATE (L/min)		
	Term. 3 ways		
			
	Exit 1	Exit 2	Exit 3
	bar		
	0,5	9,4	8,1
	1	13,4	11,6
	2	19,2	16,6
	3	23,7	20,5
	4	27,4	23,8
	5	30,5	26,6



ATTENTION:
indications valid only
for **OTHER VERSIONS!**


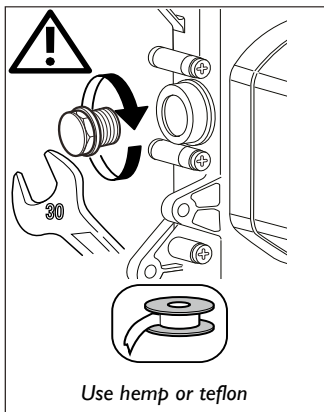


1 way

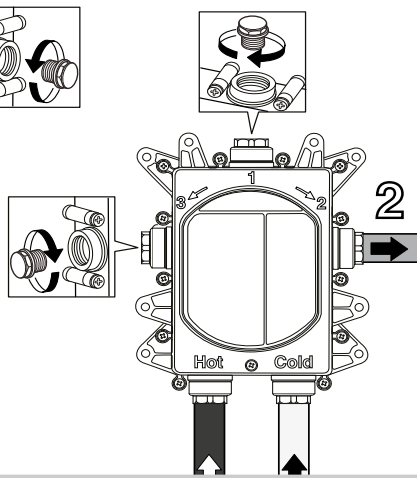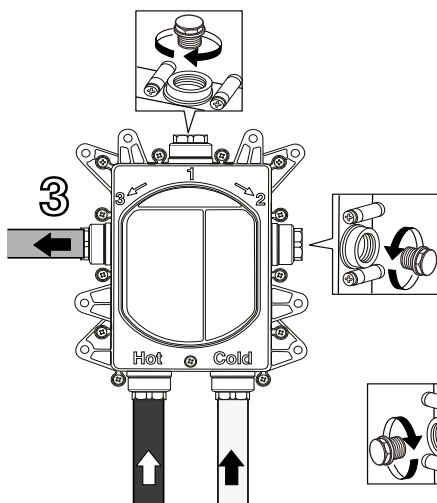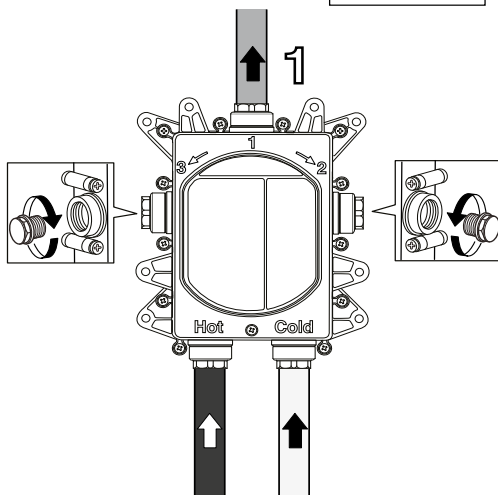






ATTENTION:
indications valid only
for **OTHER VERSIONS!**

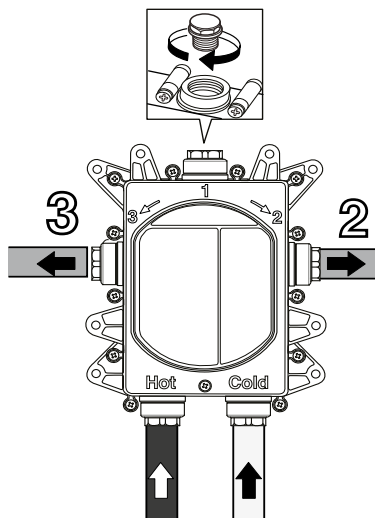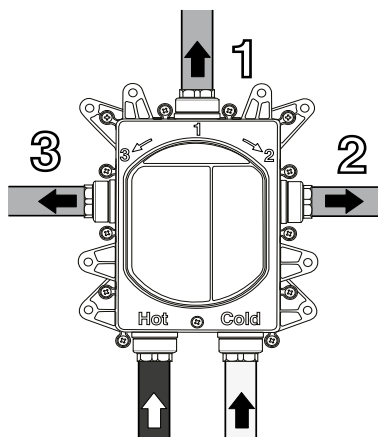2 ways**3 ways**




min. 250 mm

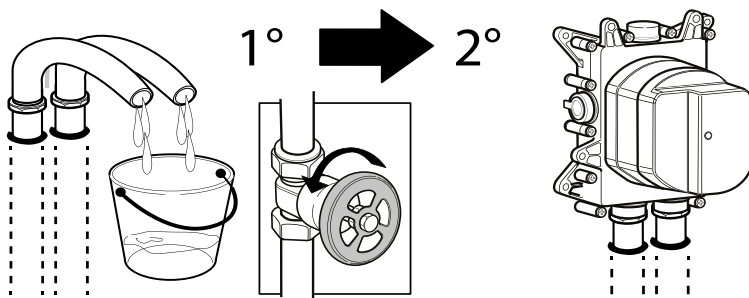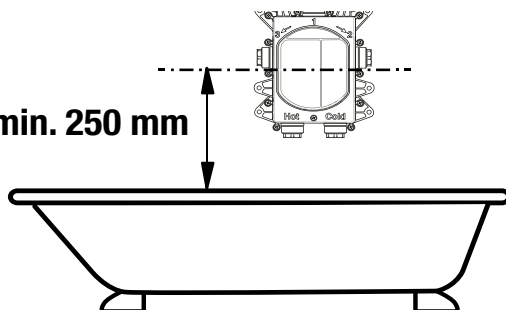





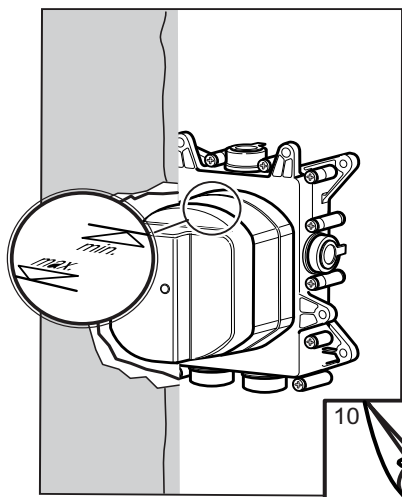




Mounting on plasterboard wall

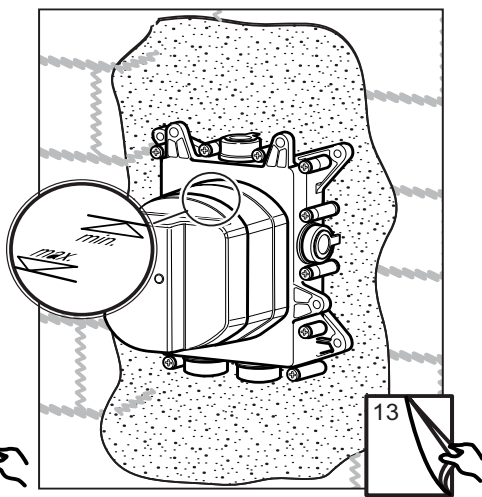


Wall mounting

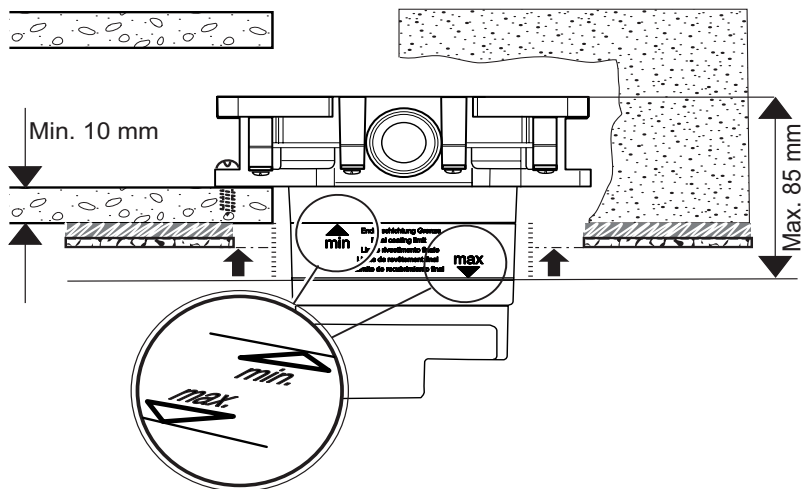

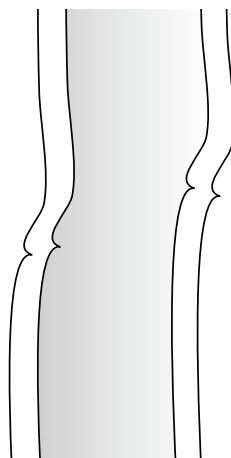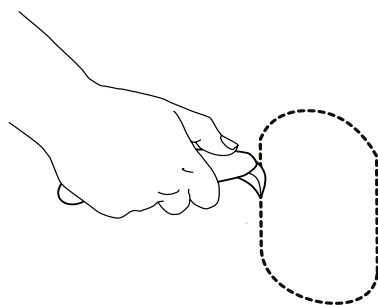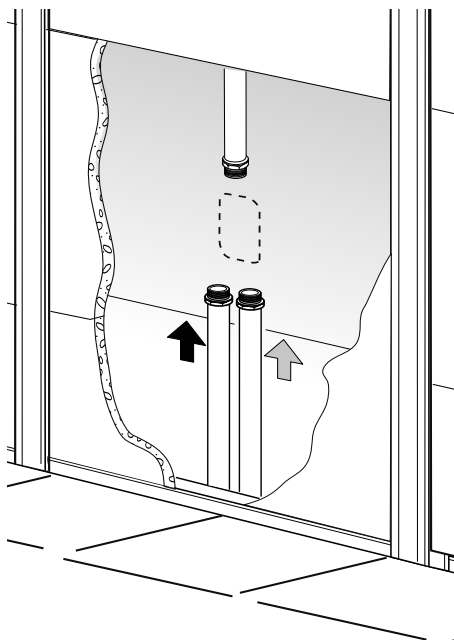


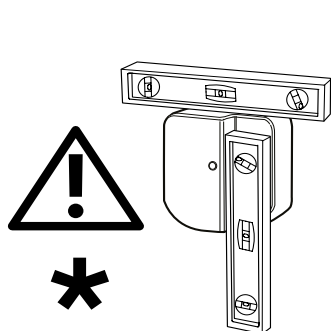


OK




NO




OK



NO



OK



NO

